


手动泵 Manual pump

CMP10-20 螺纹插式手动泵

Manual pump

订购型号 Order Type


CMP10-20

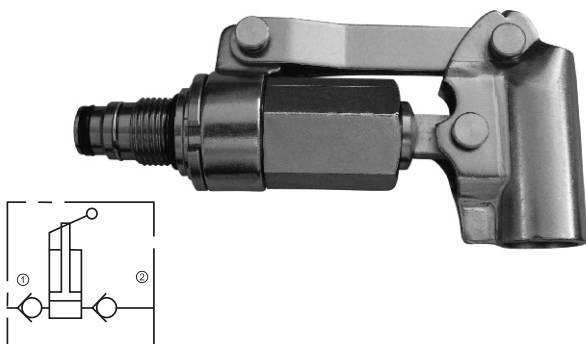

特性 Features

- 当活塞拉出时从①吸入油液，当活塞推进时由②口排出油液。
- 额定流量80ML/Rev 最大压力25Mpa。
- 油液清洁度为NAS11级，需要25um或更精密的过滤器。
- 工作油温：-20℃ ~ 80℃。


尺寸图 Dimensions

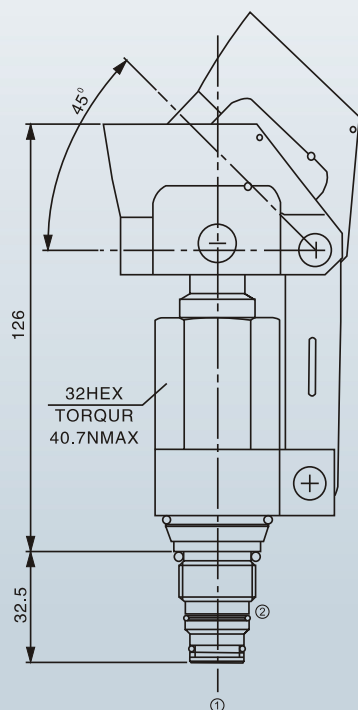

流量曲线 Performance (Cartridge Only)

- When the operator is pushed, the valve delivers flow to the 2 port. When the operator is pulled, the valve suctions fluid from the 1 port.
- Flow rate: 80ML/Rev Maximum pressure: 25Mpa.
- Oil NAS11 level of cleanliness for the need to 25um or more sophisticated filters.
- Working temperature : -20℃ ~ 80℃.

阀孔尺寸 VC102

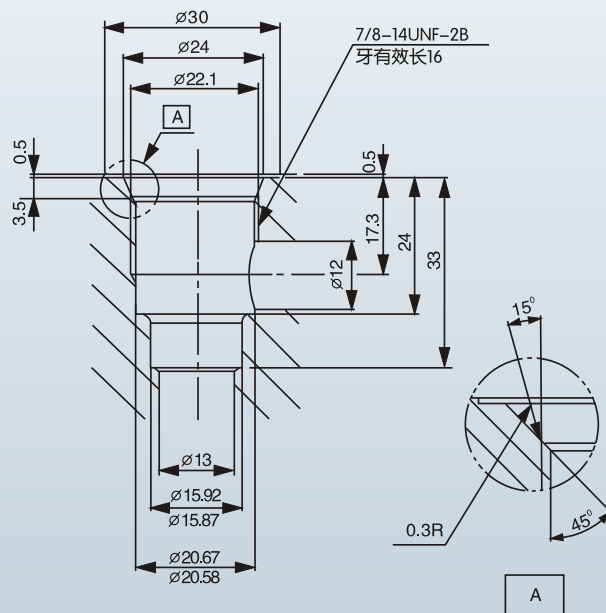

未注公差: ± 0.05